

Form PTO-1390		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER P21210
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>09/868909</b>	
INTERNATIONAL APPLICATION NO. PCT/AU00/00022	INTERNATIONAL FILING DATE 14 January 2000	PRIORITY DATE CLAIMED 15 January 1999	
TITLE OF INVENTION RESOLUTION INVARIANT PANORAMIC IMAGING			
APPLICANT(S) FOR DO/EO/US John Barratt MOORE and Tanya Louise CONROY			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information.			
<ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input checked="" type="checkbox"/> This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).</li> <li><input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).</li> <li><input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))             <ol style="list-style-type: none"> <li><input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li><input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li><input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371 (c)(2)).</li> <li><input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))             <ol style="list-style-type: none"> <li><input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li><input type="checkbox"/> have been communicated by the International Bureau.</li> <li><input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li><input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li><input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (U.S.C. 371(c)(5)).</li> </ol>			
Items 11 to 16 below concern other document(s) or information included:			
11. Assignee: <u>AUSTRALIAN NATIONAL UNIVERSITY of AUSTRALIA</u>			
12. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.			
13. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.			
14. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.			
15. <input type="checkbox"/> A substitute specification.			
16. <input type="checkbox"/> A change of power of attorney and/or address letter.			
17. <input type="checkbox"/> Figure of Drawing to be published _____			
18. <input checked="" type="checkbox"/> Other items or information: International PCT Application as published PCT/IPEA/416. PCT/IPEA/409. PCT/IPEA/402. PCT/IPEA/401. PCT/IB/308. PCT/ISA/210. Cover Letter under 35 USC 371 and 1.495. Claim of Priority.			

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

097/868909

INTERNATIONAL APPLICATION NO.  
PCT/AU00/00022ATTORNEY'S DOCKET NUMBER  
P21210

19. The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

Search report has been prepared by the EPO or JPO. . . . . \$ 860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482). . . . . \$ 690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but  
international search fee paid to USPTO (37 CFR 1.445(a)(2)). . . . . \$ 710.00Neither international preliminary examination fee (37 CFR 1.482) nor  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO. . . . . \$1,000.00International preliminary examination fee paid to USPTO (37 CFR 1.482) and all  
claims satisfied provisions of PCT Article 33(2)-(4). . . . . \$ 100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS

PTO USE ONLY

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than \_\_\_\_ 20 \_\_\_\_ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims

Number Filed

Number Extra

RATE

Total Claims

21

- 20 =

1

X \$18.00

\$18.00

Independent Claims

2

- 3 =

0

X \$80.00

\$0.00

Multiple dependent claim(s) (if applicable)

+ \$270.00

\$0.00

TOTAL OF ABOVE CALCULATIONS =

\$878.00

Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced  
by 1/2.

\$

SUBTOTAL =

\$878.00

Processing fee of \$130.00 for furnishing the English translation later than \_\_\_\_ 20 \_\_\_\_ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

+

Extension of Time fee in the amount of \$

TOTAL NATIONAL FEE =

\$878.00

Fee for recording the enclosed assignment (37 CFR 1.21(h). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

+

TOTAL FEES ENCLOSED =

\$878.00

Amount to be  
refunded

\$

Charged

\$

a. ☒ A check in the amount of \$878.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_ to cover the above fees.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to  
Deposit Account No. 19-0089.NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and  
granted to restore the application to pending status.SEND ALL CORRESPONDENCE TO CUSTOMER NO. 7055  
AT THE PRESENT ADDRESS OF:Bruce H. Bernstein  
GREENBLUM & BERNSTEIN, P.L.C.  
1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191SIGNATURE  
Bruce H. Bernstein  
NAME

29 027

REGISTRATION NUMBER

P21210.A01

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : J.B. MOORE et al.

Appl. No. : Not Yet Assigned (National Stage of PCT/AU00/00022)

Filed : Concurrently Herewith (International Filing Date January 14, 2000)

For : RESOLUTION INVARIANT PANORAMIC IMAGING

**PRELIMINARY AMENDMENT**

Assistant Commissioner of Patents  
Washington, D.C. 20231

Sir:

Prior to calculation of the fees and an examination of the above-identified patent application, the Examiner is respectfully requested to amend the claims, as follows:

IN THE CLAIMS

Please amend the claims, as follows (a marked-up copy of the claims is attached hereto):

3. (Amended-Clean Text) A panoramic imaging system as claimed in claim 1 wherein the profile of the or each convex portion at least approximates a profile defined in polar co-ordinates by the equation:

$$\frac{dr}{d\theta} = r \cot[-1/2 \int (1 + \alpha(\theta) d\theta)]$$

09/868909-000501

P21210.A01

where  $r$  is the radial distance from the reflective surface to the imaging device

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\alpha(\theta) = B_{\alpha} [\tan(\bar{\theta}) + \tan^3(\theta)]$$

$$B_{\alpha} = \frac{2(\bar{\Phi} - \Phi)}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})}$$

$\bar{\Phi}$  and  $\Phi$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.

6. (Amended-Clean Text) A panoramic imaging system as claimed in claim 1 including a first reflector surface having at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination.

9. (Amended-Clean Text) A panoramic imaging system as claimed in claim 1 including two of said first reflective surfaces each having an associated image plane with

P21210.A01

corresponding first fields of view, and at least one convex portion of each first reflective surface providing respective panoramic second fields of view, said first reflective surface being arranged back to back such that said reflective second fields of view at least partially overlap.

10. (Amended-Clean Text) A panoramic imaging system as claimed in claim 1 further including a second surface interposed between the image plane and said second reflective surface.

13. (Amended-Clean Text) A panoramic imaging system as claimed in claim 10 wherein said second reflective surface is substantially planar.

16. (Amended-Clean Text) A reflective surface as claimed in claim 14 wherein the profile of the or each convex portion at least approximates a profile defined in polar co-ordinates by the equation:

$$\frac{dr}{d\theta} = r \cot[-1/2 \int (1 + \alpha(\theta) d\theta)]$$

where r is the radial distance from the reflective surface to the imaging device

P21210.A01

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\alpha(\theta) = B_{\alpha} [\tan(\theta) + \tan^3(\theta)]$$

$$B_{\alpha} = \frac{2(\bar{\Phi} - \phi)}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})}$$

$\bar{\Phi}$  and  $\phi$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.

19. (Amended-Clean Text) A reflective surface as claimed in claim 14 including a first reflector surface, having at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination.

#### REMARKS


The Examiner is respectfully requested to enter the foregoing amendment to delete multiple dependency prior to calculation of the filing fees and examination of the above-identified patent application.

P21210.A01

The amendments to the claims made in this amendment have not been made to overcome the prior art, and thus, should be considered to have been made for a purpose unrelated to patentability, and no estoppel should be deemed to attach thereto.

Should there be any questions, the Examiner is invited to contact the undersigned at the below-listed telephone number.

Respectfully submitted,  
J.B. MOORE et al.

  
Bruce H. Bernstein  
Reg. No. 29,027 33,329

July 9, 2001  
GREENBLUM & BERNSTEIN, P.L.C.  
1941 Roland Clarke Place  
Reston, VA 20191  
(703) 716-1191

# MARKED-UP COPY OF CLAIMS

3. (Amended) A panoramic imaging system as claimed in claim 1 [or claim 2]  
wherein the profile of the or each convex portion at least approximates a profile defined  
in polar co-ordinates by the equation:

$$\frac{dr}{d\theta} = r \cot[-1/2 \int (1 + \alpha(\theta)) d\theta]$$

where r is the radial distance from the reflective surface to the imaging device

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\alpha(\theta) = B_{\alpha} [\tan(\theta) + \tan^3(\theta)]$$

$$B_{\alpha} = \frac{2(\bar{\Phi} - \underline{\Phi})}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})}$$

$\bar{\Phi}$  and  $\underline{\Phi}$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and  
minimum radial angles imaged.



P21210.A01

6. (Amended) A panoramic imaging system as claimed [in any one of claims 1 to 5] in claim 1 including a first reflector surface having at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination.

9. (Amended) A panoramic imaging system as claimed [in any one of claims 1 to 8] in claim 1 including two of said first reflective surfaces each having an associated image plane with corresponding first fields of view, and at least one convex portion of each first reflective surface providing respective panoramic second fields of view, said first reflective surface being arranged back to back such that said reflective second fields of view at least partially overlap.

10. (Amended) A panoramic imaging system as claimed [in any one of claims 1 to 9] in claim 1 further including a second surface interposed between the image plane and said second reflective surface.

13. (Amended) A panoramic imaging system as claimed in [any of claims 10 to 12] claim 10 wherein said second reflective surface is substantially planar.

P21210.A01

16. (Amended) A reflective surface as claimed in claim 14 [or claim 18] wherein the profile of the or each convex portion at least approximates a profile defined in polar co-ordinates by the equation:

$$\frac{dr}{d\theta} = r \cot[-1/2](1 + \alpha(\theta)d\theta]$$

where r is the radial distance from the reflective surface to the imaging device

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\alpha(\theta) = B_a [\tan(\theta) + \tan^3(\theta)]$$

$$B_a = \frac{2(\bar{\Phi} - \Phi)}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})}$$

$\Phi$  and  $\bar{\Phi}$  are the maximum and minimum elevations viewed  $\theta$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.

P21210.A01

19. (Amended) A reflective surface as claimed [in any one of claims 14 to 18] in claim 14 including a first reflector surface, having at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination.

## RESOLUTION INVARIANT PANORAMIC IMAGING

### FIELD OF THE INVENTION

This invention relates to generating wide angle images of spaces, generally referred to as  
5 panoramic imaging.

### BACKGROUND ART

Panoramic imaging is becoming an important tool in the area of mobile robotics and machine  
10 vision. There are many documented methods for recording a panoramic view of a scene. One  
simple method involves having a series of cameras mounted on a ring to give views around  
the entire 360° of horizon. This involves, say, four cameras if they each have a field of view  
of 90° and some integration of images. There are also a number of single camera methods for  
panoramic imaging, including rotating a camera about its vertical axis and taking pictures  
15 continuously to obtain a full panoramic view. Another approach uses wide angle lenses to  
achieve a large field of view, but these lenses are heavy, expensive and distort the image.

An attractive approach to panoramic imaging is to mount a single fixed camera under a curved  
reflective surface covering a hemisphere such as with a conical, spherical, hyperboloidal, or  
20 other profile. The optical axis of the camera is aligned with the central axis of the mirror. A  
known family of constant gain reflective surfaces have the advantage that they can produce  
large fields of view such as for a hemispherical or hyperboloidal mirror yet preserve a linear  
relationship between changes in angles of incidence and reflection of light rays viewed by the  
camera. This linear relationship simplifies image processing and ensures constant elevational  
25 resolution of the image. The shape of the surface is determined by the gain of the linear  
relationship. For a unity gain, the surface is a cone; for higher gains, the surface is specified  
by a family of polynomial functions. For ease of explanation in this specification the  
panoramic plane will be considered as being horizontal and the field of view as vertical as  
would be the case for a robot moving in a horizontal plane. It will be apparent that in the  
30 general case orientation of the planes is arbitrary.

- 2 -

All the mirror shapes mentioned above share a common drawback. That is that the CCD cameras used for imaging invariably have uniform Cartesian arrays of pixels to capture the polar image of the scene, and so the pixel density per solid angle increases with the radius of the polar image. The unwarping process transforms the image from polar to Cartesian coordinates so that the angular coordinate in the original polar image maps to the x-coordinate in the unwarped image while the radial coordinate maps to the y-coordinate. Thus the pixel density in the unwarped image varies from low for small x values which correspond to the centre of the original image to high for large x values which correspond to the outer rim of the polar image. This is illustrated in Figure 1 which shows the unwarping of an image captured with a hyperboloidal mirror. The variation in image quality is clearly evident in the unwarped version.

One way to circumvent this problem is to use a specially designed CCD camera with a polar array of pixels with a pixel density which decreases with radius. There are alignment problems with such an approach.

#### DISCLOSURE OF THE INVENTION

In a first aspect this invention provides a panoramic imaging system including an imaging device having an image plane and a first field of view, a first reflective surface having at least one circularly symmetric portion convex in a radial direction disposed in said first field of view to provide an expanded panoramic second field of view, the profile of the or each convex portion providing a varying gain between the fields of view in the radial direction to limit variation in the solid angle of view across the image plane of the imaging device.

Preferably, the profile of the convex portion provides a substantially uniform solid angle of view across the image plane. That is, the shape ensures that the resolution in the image is invariant to changes in elevation. Thus, where the imaging system involves a device with an array of uniformly spaced pixels in the image plane, the shape of the reflective surfaces results in solid angle pixel density invariance.

where  $r$  is the radial distance from the reflective surface to the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\frac{dr}{d\theta} = r \cot \left[ -\frac{1}{2} \int (1 + \alpha(\theta)) d\theta \right]$$

$$\alpha(\theta) = B_{\alpha} [\tan(\theta) + \tan^3(\theta)]$$

$$B_{\alpha} = \frac{2(\bar{\Phi} - \Phi)}{\tan^2(\bar{\Theta}) - \tan^2(\Theta)}$$

$\bar{\phi}$  and  $\underline{\phi}$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.

In one approach  $r$  can be plotted against  $\theta$  at selected intervals to describe the profile by solving the above equation for selected values of  $\theta$ . For example determining values of  $r$  for incremental values of  $\theta$  of about  $1/5^\circ$  has been found to produce a sufficiently accurate profile for practical application.

There are a number of methods for panoramic range finding. One method uses a cone mirror  
20 above a camera. The camera mirror assembly is either displaced during image collection, or  
two camera mirror assemblies are used to obtain the two views necessary for range finding.  
Although this method provides range information in the horizontal plane at video rates, its  
drawbacks are that no range information is available in the vertical (elevation) direction,  
objects must be more than a minimum distance from the camera and there may be a blind spot

- 4 -

due to the second camera system.

A discontinuous, axially symmetric mirror, which is in essence a coaxial mirror pair, mounted above a camera to obtain two views of a panoramic scene for stereo disparity range finding is known. There are however no proposals concerning specific mirror shapes to achieve specific desirable properties. Additionally, known constant gain mirror profiles have been generalised to derive a family of such coaxial mirror pair profiles for panoramic stereo imaging and processing based on disparities in the vertical plane.

- 10 In another aspect this invention provides for range finding using a panoramic imaging system containing two resolution invariant mirrors. Preferably the mirror or reflector surface has at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination. The second fields of view are preferably substantially co-incident. In the preferred form of the invention the two
- 15 convex portions form a continuous mirror or reflective surface.

- In a further aspect this invention provides a design for a back to back stereo mirror system with the desirable property of equal pixel sharing between two cameras and thus the two stereo images. The stereo cone in this case is preferably symmetric in the directions
- 20 orthogonal to the camera axis which is a desirable property for some applications. In this aspect of the invention the imaging system preferably includes two first reflective surfaces each having an associated image plane with corresponding first fields of view, and at least one convex portion of each first reflective surface providing respective panoramic second fields of view, said first reflective surface being arranged back to back such that said reflective
- 25 second fields of view at least partially overlap.

- A second reflective surface can, in some applications be interposed between the image plane and the second reflective surface. This allows positioning of the imaging device for example behind the first reflective surface. In some variations an aperture can be provided in the first
- 30 reflective surface to provide the first field of view from the imaging device.

- 5 -

In another aspect this invention provides a reflective surface for use in a panoramic imaging system including an imaging device having an imaging plane and a first field of view, said reflective surface having at least one circularly symmetric portion convex in a radial direction with a profile providing varying gain in the radial direction between an expanded panoramic  
5 second field of view provided by the reflective surface and the first field of view to limit variation in the solid angle of view across the image plane of the imaging device.

In yet a further aspect this invention provides mirrors having minimal intrusive designs, which intrude to a minimal extent into the viewing "hemisphere". These are also termed forward  
10 facing designs. They involve an additional planar mirror and camera relocation within the primary reflective surface. The attraction of this arrangement is that the first reflective mirror surface profile is the same design as in a more conventional arrangement.

The invention will be further described, by way of example only with reference to the  
15 accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates an unwarping process for a prior art panoramic imaging system;

Figure 2 schematically shows the relationship between camera image and horizontal  
20 view direction in a panoramic imaging system;



- 6 -

Figure 3 illustrates geometric relationships between a reflecting surface and a camera used to derive mirror profiles according to this invention;

Figures 4A and 4B, are graphs showing a comparison of a constant gain mirror with  
5 a variable gain mirror used in the imaging system according to this invention;

Figures 5A and 5B, shows ray traced scenes respectively reflected in constant and variable gain mirrors;

Figures 6A and 6B, graphically illustrates a comparison of panoramic imaging systems respectively utilising double constant and variable gain mirror configurations;

10 Figures 7A and 7B, shows ray traced images of scenes respectively corresponding to panoramic imaging systems utilising double constant and variable gain mirror configurations;

Figure 8 schematically illustrates relationships between camera and reflective surfaces used in range calculation utilising a resolution invariant double mirror according to this  
15 invention;

Figure 9 schematically illustrates a back to back mirror configuration according to this invention;

Figure 10 schematically illustrates a double back to back mirror configuration according to this invention;

20 Figure 11 schematically illustrates a forward looking panoramic imaging system according to this invention; and

Figure 12 shows a system utilising a combination of the arrangements in Figures 10 and 11.

## 25 BEST MODE FOR CARRYING OUT THE INVENTION

The various aspects of this invention will, for clarity, be described under separate subheadings.

### 1 Resolution Invariant Mirror Families

This section describes a family of mirror designs that achieve the objective of resolution invariance, or equivalently solid angle pixel density invariance.

### 5 1.1 Constant Image Pixel Density - The Variable Gain ( $\alpha$ ) Mirror

In accordance with one aspect of this invention resolution invariance is achieved by adjusting the mirror profile to image relatively less of the scene in the centre of the image and relatively more at the perimeter. That is, a mirror profile is selected to maintain a constant relationship  
10 between the pixel density and the angle of elevation in the scene or more precisely, the solid angle. The mirror gain  $\alpha$ , is the relationship between the change in elevation of rays incident on the mirror and the change in the angle of rays reflected into the camera as follows

$$\alpha = \frac{\delta\phi}{\delta\theta} \quad (1)$$

15 where  $\delta\phi$  is the change in vertical elevation and  $\delta\theta$  is the change in angle of reflected rays received by the camera. With resolution invariance  $\alpha$  becomes a function of image angle  $\theta$  which is related to the radial coordinate in the image,  $\rho$ , as shown in Figure 2.

Figure 3 schematically shows an imaging system including an imaging device in the form of  
20 a camera having an image plane and a first field of view. A reflective surface or mirror is ... in the first field of view to provide an expanded panoramic second field of view. The surface is circularly symmetric and convex in a radial direction.

Consider a mirror profile  $(r, \theta)$  in polar coordinates where  $r$  is the radial distance to the  
25 camera and  $\theta$  is the angle from the optical axis of the camera to the point on the mirror surface as shown in Fig. 3. The angle of incidence of a light ray relative to the mirror is  $\gamma$  and the angle of an incoming light ray with respect to the vertical is  $\phi$ . Then

- 8 -

$$\gamma = \tan^{-1} \left( \frac{rd\theta}{dr} \right) \quad (2)$$

subject to the geometric constraint (from the law of reflection)

$$2\gamma + \theta + \phi = \pi \quad (3)$$

5 Differentiating (2) and (3) with respect to  $\theta$

$$\frac{d\gamma}{d\theta} = \frac{d}{d\theta} \left[ \tan^{-1} \left( \frac{rd\theta}{dr} \right) \right] \quad \text{From (2)}$$

$$\frac{d\gamma}{d\theta} = -\frac{1}{2} \left( 1 + \frac{d\phi}{d\theta} \right) \quad \text{From (3)}$$

so, substituting  $\alpha$  from (1) gives

$$\frac{d}{d\theta} \left[ \tan^{-1} \left( \frac{rd\theta}{dr} \right) \right] = -\frac{1}{2} (1 + \alpha) \quad (4)$$

10

Now, for a variable gain mirror,  $\alpha$  is a function of image angle  $\theta$  (related to the radial coordinate in the image,  $\rho$ ) so (4) becomes

$$\frac{d}{d\theta} \left[ \tan^{-1} \left( \frac{rd\theta}{dr} \right) \right] = -\frac{1}{2} (1 + \alpha(\theta)) \quad (5)$$

or, rearranging

- 9 -

$$\frac{dr}{d\theta} = r \cot \left[ -\frac{1}{2} f (1 + \alpha(\theta)) d\theta \right] \quad (6)$$

The equation for the mirror gain,  $\alpha(\theta)$  to achieve pixel density invariance can be found using the following theory.

5

### 1.1.1 Pixel Density Invariance Profiles

There are  $p(\rho)$  pixels in an area of radius  $\rho$  in the image. More formally, there are

$$p(\rho) = \pi \kappa \rho^2$$

10 pixels in an area of radius  $\rho$ , where  $\kappa$  is the number of pixels per unit area, a constant.

Differentiating by  $\rho$  gives

$$\frac{\partial p(\rho)}{\partial \rho} = 2\pi \kappa \rho \quad (7)$$

Now, the radius in the image,  $\rho$  is related to the radial angle of a ray reflected from the  
15 mirror,  $\theta$  by the focal length of the camera,  $f$  (a constant)

$$\rho = f \tan(\theta) \quad (8)$$

so differentiating  $p(\rho)$  by  $\theta$  and substituting (7) and (8) gives

- 10 -

$$\begin{aligned}
 \frac{\partial p(\rho)}{\partial \theta} &= \frac{\partial p(\rho)}{\partial \rho} \frac{\partial \rho}{\partial \theta} \\
 &= 2\pi\kappa\rho f \frac{\partial \tan(\theta)}{\partial \theta} \\
 &= 2\pi\kappa f^2 \tan(\theta)(1 + \tan^2(\theta))
 \end{aligned} \tag{9}$$

Now, it is required that the image pixel density be invariant to angle of elevation in the scene which leads to more of the scene being imaged towards the perimeter, so

5

$$p(\rho) = \beta\phi + C(\phi) \tag{10}$$

where  $\beta$  and  $C(\phi)$  are constants. Differentiating both sides of (10) by  $\phi$  and substituting (1) and (9) gives

$$\begin{aligned}
 \beta \frac{\partial \phi}{\partial \theta} &= \frac{\partial p(\rho)}{\partial \theta} \\
 \beta &= \frac{\partial p(\rho)}{\partial \theta} \cdot \frac{\partial \theta}{\partial \phi} \\
 &= \frac{2\pi\kappa f^2 \tan(\theta)(1 + \tan^2(\theta))}{\alpha(\theta)}
 \end{aligned} \tag{11}$$

10

Rearranging (11) gives

$$\begin{aligned}
 \alpha(\theta) &= \left( \frac{2\pi f^2 \kappa}{\beta} \right) \tan(\theta)[1 + \tan^2(\theta)] \\
 &= B_a [\tan(\theta) + \tan^3(\theta)]
 \end{aligned} \tag{12}$$

where  $B_a$  is a constant. Integrating this expression for  $\alpha(\theta)$  by  $\theta$  gives an expression for  $\phi$  (see (1)), the elevation of an object imaged at angle  $\theta$ . That is

15

- 11 -

$$\phi = \frac{B_a}{2} \tan^2(\theta) + \phi(\theta = 0) \quad (13)$$

where  $\phi(\theta = 0)$  is a constant of integration.

The constants  $B_a$  and  $\phi(\theta = 0)$  can be determined from the maximum and minimum values of  $\theta$  and  $\phi$  which are known for a desired mirror configuration, using (13).

$$B_a = \frac{2(\bar{\phi} - \phi)}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})} \quad (14)$$

$$\phi(\theta = 0) = \phi - \frac{B_a}{2} \tan^2(\theta)$$

It appears not possible to find an analytical solution to (6) if  $\alpha$  is a function of  $\theta$ , so there is no explicit equation for the mirror shape. Instead, a differential equation solver is needed to find solutions to (6) over the range of  $\theta$  (the mirror surface).

Figures 4A and 4B show for comparison a constant gain mirror and a variable gain mirror with the same camera field of view and range of elevations imaged. The rays shown are constantly spaced in  $\theta$ , with about  $2^\circ$  between each ray. It is clear from Fig. 4A that in the constant gain case these rays are constantly spaced in  $\phi$ , with about  $8.5^\circ$  between each ray, and from Fig. 4, that the spacing between the rays in the variable gain case increases with increasing  $\phi$ . So, in the variable gain case, a greater proportion of the scene is imaged towards the outer edge of the polar image. This is also shown in Figures 5A and 5B, ray traced images reflected in a constant gain and variable gain mirror with the same range of elevations visible.

- 12 -

## 1.2 Panoramic Stereo Using a Variable Gain Mirror

A mirror with two convex portions or a double mirror is required. The radial profile of a double mirror is shown in Figure 8. The mirror arrangement for panoramic stereo with variable gain mirrors will necessarily be different than for constant gain mirrors due to the variation of the mirror gain,  $\alpha$ . The gain must vary in a constant fashion over the entire double mirror so that the constant pixel density

theorem will hold over the entire image. If the minimum and maximum elevations viewed ( $\bar{\phi}$  and  $\underline{\phi}$ ) are to be equal for both mirrors in the double mirror system, the range of reflected angles ( $\bar{\theta} - \underline{\theta}$ ) cannot be equal for the two mirrors. The minimum and maximum angles of reflected rays captured by the camera over the entire mirror surface are known from camera geometry. Therefore the minimum ray reflected from the lower mirror ( $\underline{\theta}_1$ ) and the maximum ray reflected from the upper mirror ( $\bar{\theta}_2$ ) are known. So, since (12) holds over the entire mirror,  $B_s$  is constant, and from (14)

$$\begin{aligned} \frac{2(\bar{\phi} - \underline{\phi})}{(\tan^2(\bar{\theta}_1) - \tan^2(\underline{\theta}_1))} &= \frac{2(\bar{\phi} - \underline{\phi})}{\tan^2(\bar{\theta}_2) - \tan^2(\underline{\theta}_2)} \\ \tan^2(\bar{\theta}_1) - \tan^2(\underline{\theta}_1) &= \tan^2(\bar{\theta}_2) - \tan^2(\underline{\theta}_2) \\ \tan^2(\bar{\theta}_1) + \tan^2(\underline{\theta}_2) &= \tan^2(\bar{\theta}_2) + \tan^2(\underline{\theta}_1) \end{aligned} \quad (15)$$

It is desirable to minimise the gap in the radial direction between the images from the two mirrors so as to maximise usage of the camera field of view. For minimum gap  $\bar{\theta}_1 = \underline{\theta}_2$ , so

$$\begin{aligned} 2 \tan^2(\bar{\theta}_1) &= \tan^2(\bar{\theta}_2) + \tan^2(\underline{\theta}_1) \\ \bar{\theta}_1 &= \tan^{-1} \left[ \left( \frac{\tan^2(\bar{\theta}_2) + \tan^2(\underline{\theta}_1)}{2} \right)^{1/2} \right] \end{aligned} \quad (16)$$

Figures 6A, 6B and 7A, 7B show graphical and ray traced comparisons of constant and variable gain double mirror systems viewing the same scene.

## 2.4 Calculation of Range for a Variable Gain Panoramic Stereo System

5

The information available for range calculation are the image angles for a single object reflected in both mirrors,  $\theta_1$  and  $\theta_2$  as shown in Figure 8. The two mirrors  $\theta_1$  and  $\theta_2$  form a reflective surface. The differential equations (6) for the surfaces are known. In the calculations that follow only the lower mirror is examined as the results are identical for the

10 upper mirror.

In order to find the position of object P, the equations of the incident beams from P to each mirror reflection point ( $r_1, \theta_1$ ) and ( $r_2, \theta_2$ ) must be found. These equations can then be solved simultaneously to give the position of object P, ( $x_p, y_p$ ).

15

$$\begin{bmatrix} y_p \\ x_p \end{bmatrix} = \begin{bmatrix} 1 & -m_{11} \\ 1 & -m_{12} \end{bmatrix}^{-1} \begin{bmatrix} C_{11} \\ C_{12} \end{bmatrix}$$

$$= \begin{bmatrix} -\frac{m_{12}}{m_{12}-m_{11}} & \frac{m_{11}}{m_{12}-m_{11}} \\ -\frac{1}{m_{12}-m_{11}} & \frac{1}{m_{12}-m_{11}} \end{bmatrix} \begin{bmatrix} C_{11} \\ C_{12} \end{bmatrix} \quad (17)$$



- 14 -

where  $m_{II}$  is the gradient of the incident beam to the lower mirror and  $C_{II}$  is the equation constant. The equation constant is given by

$$C_{II} = y_I - m_{II} x_I \quad (18)$$

where

5

$$\begin{aligned} x_I &= r_I \sin \theta_I \\ y_I &= r_I \cos \theta_I \end{aligned} \quad (19)$$

are the Cartesian coordinates of the reflection point  $(r_I, \theta_I)$ . The gradient of the incident  
10 beam is found using the law of reflection

$$m_{II} = \tan \left[ \tan^{-1} \left( \frac{dy_I}{dx_I} \right) + \tan^{-1} \left( \frac{1}{m_{RI}} \right) - \tan^{-1} \left( \frac{dx_I}{dy_I} \right) \right] \quad (20)$$

where  $m_{RI}$  is the gradient of the reflected beam from the lower mirror to the camera and  
15  $dy_I/dx_I$  is the gradient of the lower mirror profile at the reflection point. The gradient of the reflected beam is

$$m_{RI} = \tan \theta_I \quad (21)$$

The gradient of the mirror profile for the lower variable gain mirror is found as in the constant gain case, from

20

- 15 -

$$\begin{aligned}
 \frac{dy_1}{dx_1} &= \frac{dy_1}{d\theta_1} / \frac{dx_1}{d\theta_1} \\
 &= \frac{\frac{dr_1}{d\theta_1} \cos \theta_1 - r_1 \sin \theta_1}{\frac{dr_1}{d\theta_1} \sin \theta_1 + r_1 \cos \theta_1}
 \end{aligned} \quad (22)$$

where  $dr/d\theta$  for either mirror of the variable gain mirror configuration is found by integrating (5) and substituting (12).

$$\begin{aligned}
 \int d \tan^{-1} \left( r \frac{d\theta}{dr} \right) &= -\frac{1}{2} \int (1 + \alpha(\theta)) d\theta \\
 \tan^{-1} \left( r \frac{d\theta}{dr} \right) &= -\frac{1}{2} \theta - \frac{B_\alpha}{2} \int (\tan(\theta) + \tan^3(\theta)) d\theta \\
 &= -\frac{1}{2} \theta - \frac{B_\alpha}{4} \tan^2(\theta) + D
 \end{aligned} \quad (23)$$

where  $D$  is a constant of integration. Rearranging (23) gives

$$\frac{dr}{d\theta} = r \cot \left( -\frac{1}{2} \theta - \frac{B_\alpha}{4} \tan^2(\theta) + D \right) \quad (24)$$

Now from (23) and (2),

$$D = \gamma + \frac{1}{2} \theta + \frac{B_\alpha}{4} \tan^2(\theta) \quad (25)$$

10 so, for the lower variable gain mirror profile

- 16 -

$$D_1 = \gamma_1 + \frac{1}{2}\theta_1 + \frac{B_a}{4} \tan^2(\theta_1)$$

similarly for  $D_2$ , for the upper variable gain profile.

So, by substituting (24) into (22) gives the gradient of the variable gain mirror profiles at any point. Note that as in the constant gain case, the gradient depends only on  $\theta$ .

The equation constants for the incident beam equations from (18) require the polar coordinates of the reflection points from each mirror,  $(r_1, \theta_1)$  and  $(r_2, \theta_2)$ . Since the variable gain mirror equations are not known exactly,  $r_1$  and  $r_2$  must be found using a differential equation solver

## 2 Back-to-back Stereo Mirror Families

A key disadvantage of single camera stereo panoramic systems is that since there are two  
15 images of the "same" scene, the pixels assigned to each image is half that for non stereo  
panoramic imaging and the two images do not share an equal number of pixels in constant  
gain schemes. Actually, the panoramic stereo double mirror method typically causes the view  
of a scene in one radial direction to be compressed into around 1/4 the field of view of the  
camera.

20

A method to achieve panoramic stereo with less image compression is to use two cameras and two single curved mirror surfaces back to back, as shown in Fig. 9. This method compresses the imaged scene into 1/2 the field of view of the camera, and indeed each image has an equal share of the total number of pixels available. There are, however, possible alignment problems with this system as with any stereo system using two cameras to capture two views of a scene.

An advantage of the scheme proposed in Fig. 9 is that the stereo cone can be symmetric about

the horizon using two cameras with equal fields of view and the maximum and minimum angles of elevation reflected by the two mirrors being equal. The angle covered by the stereo cone in this case is  $2\bar{\phi} - \pi$ . Fig.9 shows the general case where the maximum and minimum angles of elevations viewed by each camera need not be equal. The range of elevations must still be equal for the fields of view to be aligned.

The number of free parameters to be specified are reduced here as the minimum angle of elevation ( $\phi$ ) and from one mirror must be parallel to the maximum angle of elevation ( $\bar{\phi}$ ) from the other mirror. This is to ensure that the fields of view are parallel. So, with reference to Fig. 9

$$\phi = \pi - \bar{\phi} \quad (26)$$

In the scheme of Fig. 9, the mirror families can be either constant gain or resolution invariant.

## 2.1 The Use of Double Mirrors in a Back to Back Design

Fig. 10 shows a back to back design incorporating double mirrors. Although the figure shows constant gain mirrors, the double mirror can also have a variable gain. The advantage to this system is that the stereo cone from the back to back configuration combines with the stereo cones from the double mirror configuration to increase the total area imaged in stereo. In this configuration, the fields of view of each double mirror pair need not be aligned as in previous examples. For symmetry about the horizon  $\phi_1 = \phi_2$ ,  $\phi_3 = \phi_4$ ,  $\bar{\phi}_3 = \bar{\phi}_1$  and  $\bar{\phi}_4 = \bar{\phi}_2$ . The constraints

- 18 -

$$\begin{aligned}\overline{\Phi_3} &= \pi - \overline{\Phi_2} \\ \overline{\Phi_4} &= \pi - \overline{\Phi_1}\end{aligned}$$

align the three stereo cones.

It is also possible to increase the total stereo cone further by allowing the mirror pairs to have  
5 different gains.

### 3 Forward Looking Mirror Design

An example of a forward looking mirror design is shown in Fig. 11. For many applications,  
10 it is desirable to have a panoramic camera looking out from, say, a hemisphere, somewhat as  
an eye of a bird, or perhaps two such on either side of a "nose cone". There are aerodynamic  
considerations or other protrusion considerations which motivate such a "forward looking"  
system. This configuration is termed forward looking because the camera faces towards the  
scene. Either a constant or variable gain mirror (double or single) could be used for the  
15 curved mirror in the system. The planar mirror is an annulus or circle interposed such that  
all rays reflected from the curved mirror are reflected into camera  $o$  positioned behind the  
curved mirror. The dotted lines in Fig. 11 show where the reflected rays would converge if  
the planar mirror was removed and the dotted camera shows the camera  $o'$  for an equivalent  
system without the planar mirror.

20

In order for the rays reflected by the planar mirror to converge at the new camera position,  
the planar mirror must be the perpendicular bisector of the line joining the old and new  
camera locations. Hence the distance between the camera locations is  $2D$  where  $D$  is defined  
in Fig. 11 as the distance from either camera to the planar mirror. The introduction of the  
25 planar mirror into the system does increase the possibility of alignment difficulties as the  
planar mirror must be perpendicular to the camera axis and also be positioned so as to reflect  
all rays from the curved mirror into the camera without occluding the view of the curved  
mirror.

- 19 -

The maximum value for  $D, \bar{D}$ , is when the maximum beam reflected from the mirror system (the  $\bar{\theta}$  beam reflected at point  $b$  on the planar mirror) into camera  $o$  grazes the curved profile at  $c$ . In this case

$$\bar{D} = \frac{r \cos(\bar{\theta}) [\tan(\bar{\theta}) + \tan(\bar{\theta})]}{2 \tan(\bar{\theta})} \quad (27)$$

$\bar{D}$ , defines the minimum height for the mirror system,  $\bar{H}$ . In practice, the value for  $D$  needs to be slightly smaller to avoid occlusion, leading to a larger mirror system height. The general equation for the height of the mirror system is

$$H = \bar{r} \cos(\bar{\theta}) - D \quad (28)$$

It should also be noted that  $\bar{\theta}$  must be greater than zero for camera  $o$  to be located behind the curved mirror. Also,  $\bar{\phi} \geq \bar{\theta}$  if the minimum elevation ray  $\bar{\phi}$  is not to be occluded by the planar mirror.

Fig. 12 shows a design that incorporates the ideas of Sections 2 and 3. It consists of two forward looking systems back to back, giving a design reminiscent of a eye mounted on a stalk, such as a crab's eye. The "stalk" for this system would be hidden from view by the lower planar mirror. In this arrangement portions are provided in the curved mirror to provide for reflection of rays from the curved surface to the camera by the plane mirrors.

- 20 -

The foregoing describes only some aspects of the present invention and modifications can be made without departing from the scope of the invention.

5

09868909.090501

- 21 -

## CLAIMS:

1. A panoramic imaging system including an imaging device having an image plane and a first field of view, a first reflective surface having at least one circularly symmetric portion  
 5 convex in a radial direction disposed in said first field of view to provide an expanded panoramic second field of view, the profile of the or each convex portion providing a varying gain between the fields of view in the radial direction to limit variation in the solid angle of view across the image plane of the imaging device.
- 10 2. A panoramic imaging system as claimed in claim 1 wherein the profile of the or each convex portion provides a substantially uniform solid angle of view across the image plane.
3. A panoramic imaging system as claimed in claim 1 or claim 2 wherein the profile of the or each convex portion at least approximates a profile defined in polar co-ordinates by the  
 15 equation:

$$\frac{dr}{d\theta} = r \cot \left[ -\frac{1}{2} \int (1 + \alpha(\theta)) d\theta \right]$$

where  $r$  is the radial distance from the reflective surface to the imaging device

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

$$\alpha(\theta) = B_{\alpha} [\tan(\bar{\theta}) + \tan^3(\theta)]$$

$$B_{\alpha} = \frac{2(\bar{\phi} - \phi)}{\tan^2(\bar{\theta}) - \tan^2(\underline{\theta})}$$

$\bar{\phi}$  and  $\phi$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.



- 22 -

4. A panoramic imaging system as claimed in claim 3 wherein the profile of the or each convex portion includes by a series spaced apart points defined by determining distance  $r$  for selected values of angle  $\theta$ .

5. A panoramic imaging system as claimed in claim 4 wherein the selected values of  $\theta$  are separated by about  $1/5^\circ$ .

6. A panoramic imaging system as claimed in any one of claims 1 to 5 including a first reflector surface having at least two of said convex portions arranged to respectively provide at least partially overlapping panoramic second fields of view for range determination.

7. A panoramic imaging system as claimed in claim 6 wherein said panoramic second fields of view are substantially co-incident.

8. A panoramic imaging system as claimed in claim 7 wherein said at least two convex portions form a continuous reflective surface.

9. A panoramic imaging system as claimed in any one of claims 1 to 8 including two of said first reflective surfaces each having an associated image plane with corresponding first fields of view, and at least one convex portion of each first reflective surface providing respective panoramic second fields of view, said first reflective surface being arranged back to back such that said reflective second fields of view at least partially overlap.

10. A panoramic imaging system as claimed in any one of claims 1 to 9 further including a second reflective surface interposed between the image plane and said second reflective surface.

11. A panoramic imaging system as claimed in claim 10 wherein the imaging device is positioned behind the second reflective surface.

- 23 -

12. A panoramic imaging system as claimed in claim 11 wherein an aperture is provided in said first reflective surface to provide said first field of view from the imaging device.

5 13. A panoramic imaging system as claimed in any of claims 10 to 12 wherein said second reflective surface is substantially planar.

14. A reflective surface for use in a panoramic imaging system including an imaging device having an imaging plane and a first field of view, said reflective surface having at least  
10 one circularly symmetric portion convex in a radial direction with a profile providing varying gain in the radial direction between an expanded panoramic second field of view provided by the reflective surface and the first field of view to limit variation in the solid angle of view across the image plane of the imaging device.

15 15. A reflective surface as claimed in claim 14 wherein the profile of the or each convex portion provides a substantially uniform solid angle of view across the image plane.

16. A reflective surface as claimed in claim 14 or claim 18 wherein the profile of the or each convex portion at least approximates a profile defined in polar co-ordinates by the  
20 equation:

$$\frac{dr}{d\theta} = r \cot \left[ -\frac{1}{2} \int (1 + \alpha(\theta)) d\theta \right]$$

where  $r$  is the radial distance from the reflective surface to the imaging device

$\theta$  is the angle from the optical axis of the imaging device

$\alpha(\theta)$  is the mirror gain given by

25  $\alpha(\theta) = B_a [\tan(\theta) + \tan^3(\theta)]$

$$B_a = \frac{2(\overline{\Phi} - \Phi)}{\tan^2(\overline{\theta}) - \tan^2(\underline{\theta})}$$

- 24 -

$\bar{\Phi}$  and  $\underline{\Phi}$  are the maximum and minimum elevations viewed  $\bar{\theta}$  and  $\underline{\theta}$  are the maximum and minimum radial angles imaged.

17. A reflective surface as claimed in claim 16 wherein the profile of the or each convex  
5 portion includes by a series spaced apart points defined by determining distance  $r$  for selected values of angle  $\theta$ .

18. A reflective surface as claimed in claim 17 wherein the selected values of  $\theta$  are  
separated by about  $1/5^\circ$ .

10

19. A reflective surface as claimed in any one of claims 14 to 18 including a first reflector  
surface, having at least two of said convex portions arranged to respectively provide at least  
partially overlapping panoramic second fields of view for range determination.

15 20. A reflective surface as claimed in claim 19 wherein said panoramic second fields of  
view are substantially co-incident.

21. A reflective surface as claimed in claim 20 wherein said at least two convex portions  
form a continuous reflective surface.

1/12

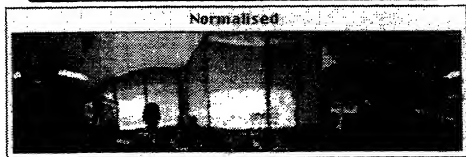
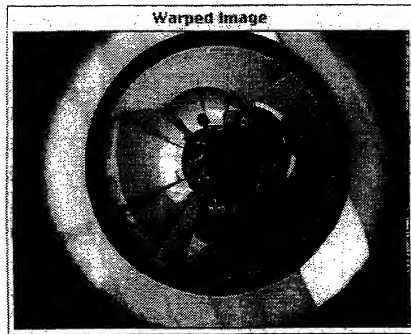




FIGURE 1

2/12

**FIGURE 2**

3/12

**FIGURE 3**

4/12

09/868909




FIGURE 4A




FIGURE 4B

5/12

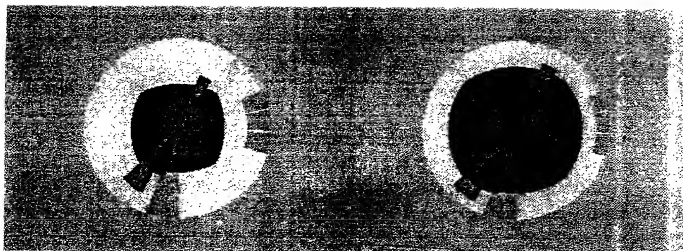


FIGURE 5A

FIGURE 5B



6/12




FIGURE 6A


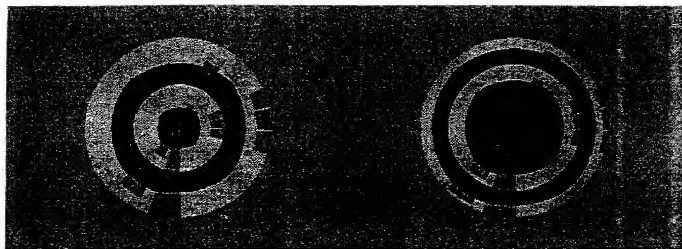


FIGURE 6B

7/12

09/868909:00053

**FIGURE 7A****FIGURE 7B**

8/12

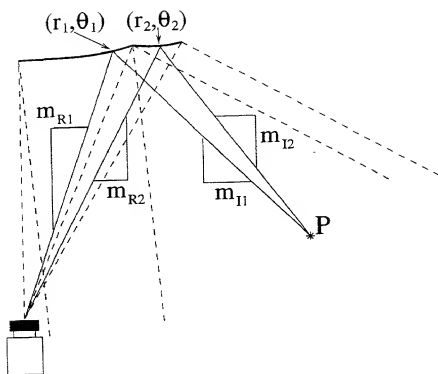


FIGURE 8

9/12

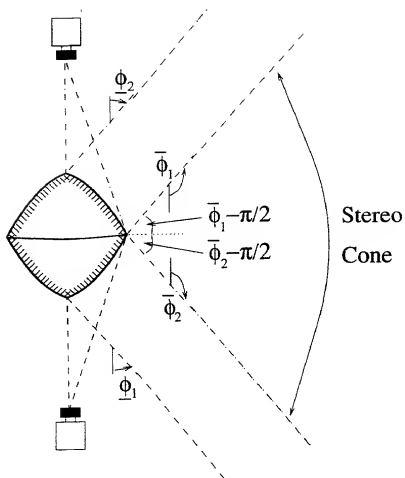
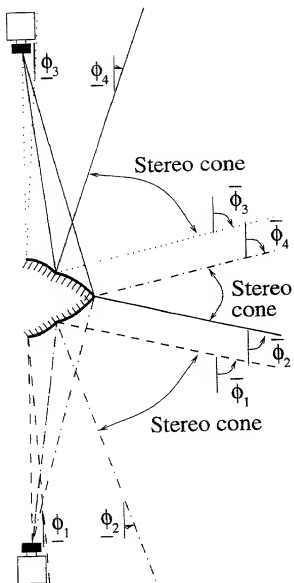


FIGURE 9

10/12

**FIGURE 10**

11/12

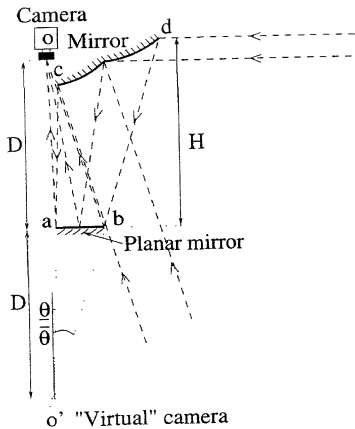
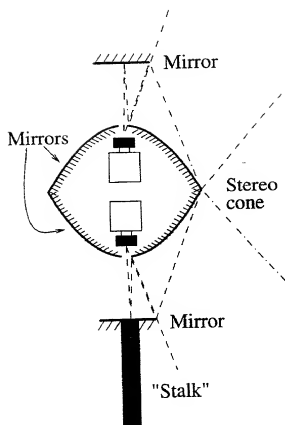


FIGURE 11

12/12

**FIGURE 12**

# Declaration and Power of Attorney For Utility or Design Patent Application English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Resolution invariant panoramic imaging

the specification of which is attached hereto unless the following box is checked:

☒ was filed on \_\_\_\_\_  
as \_\_\_\_\_

United States Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable) or,

PCT International Application Number PCT/AU00/00022 filed on 14 January 2000  
and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 (a-d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below. I have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

			Priority Claimed	
<u>PP8191/99</u>	<u>Australia</u>	<u>15 January 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
<u>PCT/AU00/00022</u>	<u>PCT</u>	<u>14 January 2000</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

_____	_____
(Number)	(Day/Month/Year Filed)
_____	_____
(Number)	(Day/Month/Year Filed)
_____	_____
(Number)	(Day/Month/Year Filed)

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.



I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

- ☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

### CUSTOMER NUMBER 7055

The appointed attorneys include:

Neil F. Greenblum	Reg. No. <u>28,394</u>	Stephen M. Roylance	Reg. No. <u>31,296</u>
Bruce H. Bernstein	Reg. No. <u>29,027</u>	Leslie J. Papierier	Reg. No. <u>33,329</u>
Arnold Turk	Reg. No. <u>33,094</u>	William Pieprz	Reg. No. <u>33,630</u>
James L. Rowland	Reg. No. <u>32,674</u>	William E. Lyddane	Reg. No. <u>41,568</u>

At: Greenblum & Bernstein, P.L.C.  
1941 Roland Clarke Place  
Reston, VA 20191


Direct Telephone Calls to: Greenblum & Bernstein, P.L.C. (703) 716-1191

Full name of sole or first inventor	<b>JOHN BARRATT MOORE</b>	
Inventor's signature x <i>J.B. Moore</i>	Date	15/8/2001
Residence	8a Residence 8, Chinese University of Hong Kong, Sha Tin, C New Territories, Hong Kong, China	
Citizenship	Australian	
Post Office Address	"As above"	

(Supply similar information and signature for second and subsequent joint inventors.)

Full name of second joint inventor, if any		TANYA LOUISE CONROY	
Second Inventor's signature	Date 16/8/01		
Residence 8 Fenwick Place, Belconnen, Canberra, Australian Capital Territory			
Citizenship Australian		2617 Australia	
Post Office Address "as above"			
Full name of third joint inventor, if any			
Third Inventor's signature		Date	
Residence			
Citizenship			
Post Office Address			
Full name of fourth joint inventor, if any			
Fourth Inventor's signature		Date	
Residence			
Citizenship			
Post Office Address			
Full name of fifth joint inventor, if any			
Fifth Inventor's signature		Date	
Residence			
Citizenship			
Post Office Address			
Full name of sixth joint inventor, if any			
Sixth Inventor's signature		Date	
Residence			
Citizenship			
Post Office Address			

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division



Application deficiencies found during scanning:

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

✓ Scanned copy is best available. Fig 5, 7, are too dark